

5110 Atlantic Ave. Raleigh, NC 27616 1-800-790-1635 | AmeriGlide.com

1. GENERAL INFORMATION

1.1 Dealer Information	1.3 Reference
Date (MM/DD/YY)	Job Name
Dealer # PO #	Location
Dealer	1.4 Shipping Information Shipping costs varies on location, volume and method of shipment.
Phone	Freight Collect - Pay freight line direct for shipping cost
	Pre-Paid Freight - Adds cost to your order
1.2 Accounts Payable Contact	Customer Pick Up
Name	Ship to
Phone	

Due to continually evolving product and installation codes and variations in codes among jurisdictions, certain standard features and product options may not apply to every order. AmeriGlide authorized dealers are required to ensure that installation of each elevator complies with all local regulations and code requirements governing the installation and use of elevators for the municipality in which they are installed. AmeriGlide strongly recommends that customers consult with their local authority to ensure that their elevator features and the installation of their elevator meets all regulations and code requirements for their jurisdiction.

Standard Features Include:

Mechanical:

- · Maximum travel to 31'
- · Capacity: 500 lbs
- Extruded aluminum track (mill finish)
- Dual winding cable drums with 1/4" aircraft cables

Car:

- Finish: RAL 9002 powder coated metal
- Configuration: Single car entry
- Fold down seat
- Telephone
- · Sliding car door with clear visions panels

General:

- · Speed: 15 fpm
- · Maximum number of stops: 4
- Data plates and capacity tags

Safety Devices:

- · Limit switches at each stop
- · Final limit at top and bottom
- Emergency stop
- · Slack cable device
- Car door switch
- Two residential Honeywell hoistway door interlocks

Controls:

- · Battery powered
- · Battery charger
- · Controller: Circuit board
- · Automatic operation
- RF wireless call stations
- · Diagnostic indicator
- Automatic lighting

2. Base I	Price
-----------	-------

_		
	Carolina	Elovoto
	Carollila	Elevator

3. Number of Stops

3*↓ 4*	O 2	
○ 4*	○ 3*	
_		

*includes extra interlocks and call stations

4. Travel

O Up to 21'	
O Up to 31'	

CAROLINA **ELEVATOR**

ORDER FORM

5. Hoistway

Hoistway by Others	
Acrylic Hoistway Enclosure	
Over 8ft ft	
O Top Floor	
Middle 2 Floor	
Middle 1 Floor	
O Bottom Floor	

7. Car Finish


Powder Coated Car Walls
Clear Vision Panels in Car Walls
Custom Color RAL Powder Coating Adds to lead time. Requires approval of sample.
Elevator Car
○ Track / Header
Additional Track (3 Stop and 4 Stop)
Enclosure (per floor)
Additional Track (3 Stop and 4 Stop)
RAL Color #

6. Optional Equipment

	Englacure Ctule Dearwith DDI Interlegic
\bigcirc	Enclosure Style Door with RDI Interlock
	(36" x 80") for hoistway by others
	RH Swing LH Swing
	Qty Qty
	Qty Qty
\circ	Flush Door Frame with RDI Interlock (36" x 80")
	for hoistway and door slabs by others
	Qty
	·
\cup	Fire Rated Steel Door with RDI Interlock
	(36" x 80") for hoistway by others
	RH Swing LH Swing
	Qty
	Kara Orathala are Oall Obestian a
\cup	Key Switch on Call Stations
	Wireless Key Fob
\circ	Automatic Homing
	Specify Floor
\circ	Extra RDI Interlock for door by others
0	State Code Compliance Package
	(includes Z97.1 labels, rope tags, wiring for
	remote disconnect by others, car mounted
	lockable disconnect)
\bigcirc	Washington State Compliance Package
0	lockable disconnect) Washington State Compliance Package

8. Car Configuration

 ${\it Choose your car configuration from the illustrations below. Select one only.}$










Right Side Entry RH Gate







Left Side Entry LH Gate


Left Side Entry RH Gate



LH Gate








Note: Wheelchairs come in a variety of sizes. Be sure to check the size and weight of the wheelchair being used before deciding on any elevator or lift to assure choice of model will provide the space and load capacity needed.


Codes: While Staying Home Corporation builds all elevators to meet ASME A17.1, Part 5.3, Residential Elevator Standards when installed correctly, some states, cities and/or counties implement local codes that override these standards. Always check with the local authority having jurisdiction to verify the codes that must be adhered to in you location.

9. Measurements

$oldsymbol{\Theta}$	4th Floor to Ceiling
G	Ceiling to 3rd Floor
(E)	3rd Floor to Ceiling
(D)	Ceiling to 3rd Floor
©	2nd Floor to Ceiling
B	Ceiling to 2nd Floor
A	1st Floor to Ceiling

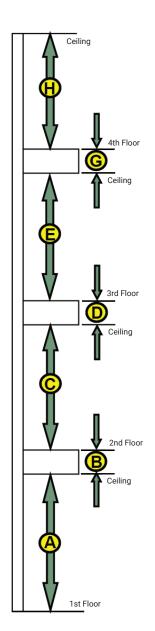

10. Door Openings per Floor

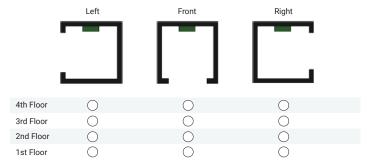

11. Hoistway Door Swings

